

Electrolytic Tilt Sensor Basics



INTRODUCTION

SPECTRON'S ELECTROLYTIC LEVEL (Tilt) SENSORS are basically resistance potentiometers. They are A.C. devices and should not be exposed to D.C. currents. D.C. currents cause an electroplating action between electrodes and a precipitation (deionization) of the conducting salts in the electrolyte.

As an A.C. device, with the plate-like construction of the electrodes, there is a capacitive effect within the device in addition to the resistance element. It is only necessary to address this characteristic when used at high frequencies or when excited with square waves.


In mounting, it should be remembered that glass, a brittle material, fails only from tensile stresses, never from shear or compression. It is to the customer's advantage to place responsibility of mounting and aligning the sensor on Spectron.

ELECTRICAL CHARACTERISTICS

At low frequencies, the end to end impedance, considered resistive in nature, can be supplied in the range of 1,000 to 10,000 ohms. With today's high impedance input electronics, most customers will prefer the higher impedance units so as to minimize power drain. Scale Factor is inversely proportional to range and range inversely proportional to the radius of curvature of the inner cavity. Sensitivity, or resolution is best with the sensors having the greatest radius of curvature.

Equivalent Circuit:

Definition of Null: $R1 = R2$ when level

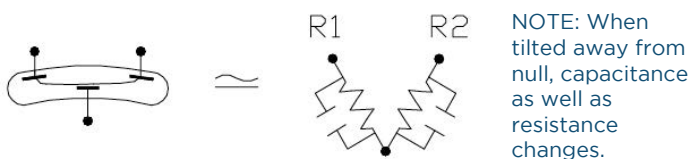

RECOMMENDED CIRCUIT USE

The most accurate treatment of the sensor in a users system is as a voltage divider or ratiometer. This is of course due to the immunity to minor changes in excitation levels. At null, or when horizontal, the ratiometer is at the 0.5 setting. With + and - tilts, this ratio will be altered without a phase or polarity change.

CONDITIONING CIRCUIT CONSTRUCTION

The most popular configuration is the A.C. Wheatstone bridge circuit. The sensor can be used as one half the bridge with the full excitation voltage across the sensor or as the lower half of a bridge with resistors in series with each half of the sensor. Gyro instrument users prefer this configuration and substitute torquing coils for the series resistors.

- Excitation voltage = 5 volts peak to peak
- Excitation frequency = 500Hz - 5KHz
- Either a square or sine wave is acceptable, there is no advantage of one over the other.
- Tantalum capacitors are acceptable for decoupling the excitation signal.
- When the excitation voltage is applied to the outer electrodes, and a phase sensitive voltmeter is hooked up between the center electrode and one of the excitation electrodes, it has an output signal proportional to the tilt angle. The output is zero if the sensor is aligned with the vertical plane.
- Any deviation from the alignment increases the output voltage.
- The tilt direction can be deduced from the phase between the excitation and center electrodes. The phase varies from 0° to 180°.
- The output impedance for the excitation should be lower than 10 ohms, while the input impedance, which is tied to the center electrode, should be higher than 5 megohms.