


Electrolytic Tilt Sensors

SH50050 Ceramic Series



The SH 50050 Ceramic Series of single axis **Electrolytic Tilt Sensors** utilize advanced ceramic materials, bonded together with glass, resulting in a rugged hermetically sealed package. The 96% alumina material body is molded into intricate and precise shapes, that determine range, sensitivity, and dynamic response. The molded body also incorporates a reference surface for easy mounting and even heat transfer for uniform thermal stability. The conductivity and viscosity of the electrolyte can be altered to provide the desired performance and response. These high accuracy, low cost angle sensors are ideally suited for OEM applications that require sub-arc second resolution, with limited space availability.

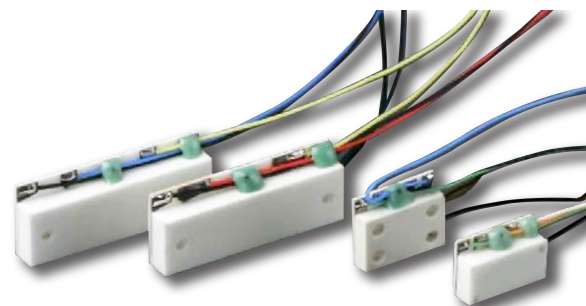

Applications

- Construction Lasers
- Weapons Aiming
- Aerospace
- Magnetometer Correction
- Industrial
- Geophysical Tilt Meters
- Oceanographic
- Machine Tools
- Camera Systems

Specifications

CHARACTERISTICS	MODEL				
	SH50054-A-003	SH50055-A-009	SH50056-A-003	SH50056-A-008	SH50058-A-003
Linear Range (arc degrees) ***	+/- 3	+/- 0.5	+/- 60	+/- 60	+/- 10
Total Range	+/- 6	+/- 1	+/- 80	+/- 80	+/- 15
Output (mV/arc second)	0.4	1.0	-	-	-
Output (mV/arc degree) *	-	-	160	160	420
Resolution (arc degrees) *	<.0003	<.0001	<.001	<.001	<.0005
Null Repeatability (arc degrees)	<.0008	<.0008	<.02	<.02	<.001
Symmetry @ 1/2 linear scale (%)	<2	<2	<2	<2	<2
Accuracy @ 1/2 Linear Scale (%FS) **	<2	-	<0.8	<0.8	<2
Accuracy @ Full Scale (%FS)	<8	-	<3	<3	<5
Null Impedance (Kohms) +/-20%	12	1	8	8	40
Null Stability, 12 hrs. @ 25 deg.C (arc deg's, typ.)	<.0005	<.0005	<.005	<.005	<.001
Shock Survival (G's, minimum)	100	100	100	100	100
Temperature Range (deg. C)					
Operating	-54 to +125				
Storage	-76 to +150				
Temp. Coefficient of Scale (%/deg.C, typ.)	0.6	0.6	0.1	0.1	0.1

* = Output levels derived using MUPI-3 Signal Conditioner.

** = Higher accuracy models available. Consult factory for details.





*** = Extended ranges available. Consult factory for details.

Note: The electrolyte used in these sensors is an Alcohol based fluid, contains no heavy metals, and is non-corrosive. The conductivity and viscosity can be custom tailored to satisfy widely varied applications.

Electrolytic Tilt Sensors SH50050 Ceramic Series



Dimensions in inches (mm)

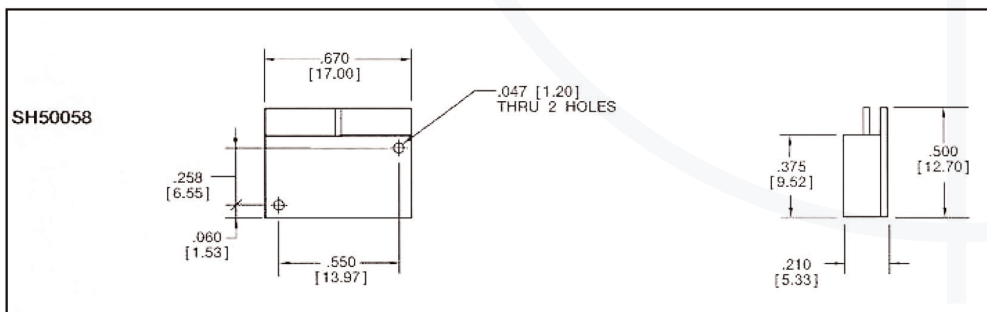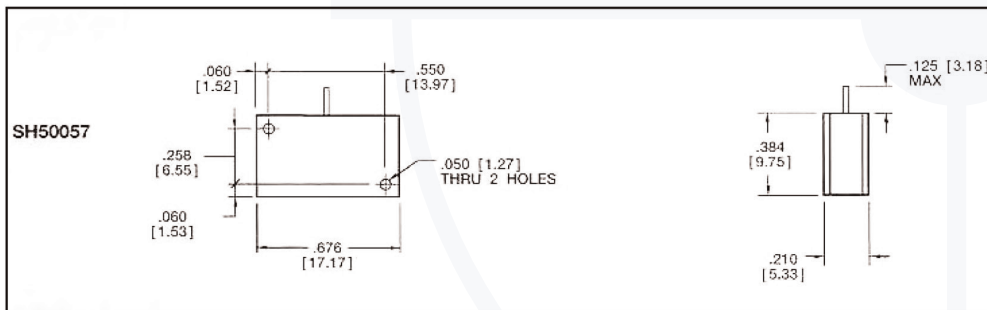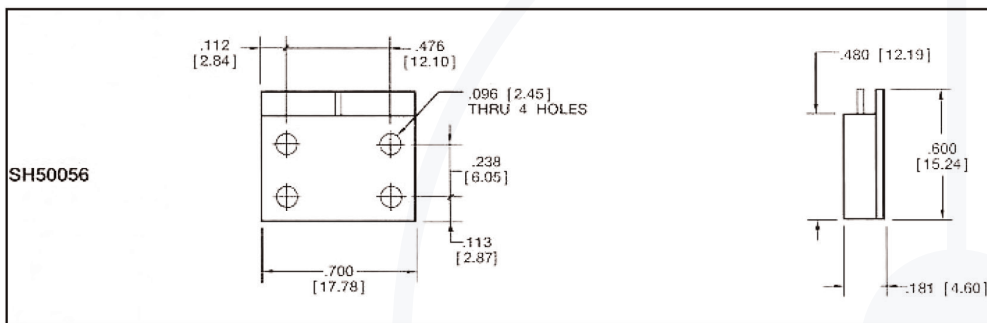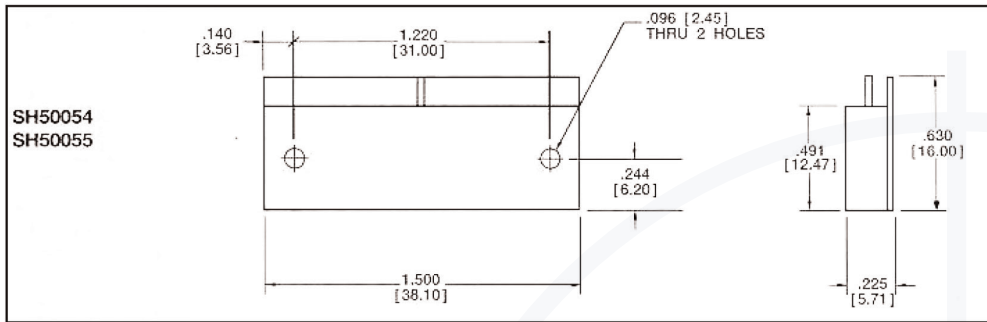

Electrolytic Tilt Sensors

SH50050 Ceramic Series



Electrical Connections

Wire Color	Function	SH50054-A-003	SH50055-A-009	SH50056-A-003	SH50056-A-008	SH50058-A-003
Red	Output	•		•		
Yellow	Output	•	•			•
Blue	Output		•		•	
Green	Output			•	•	
Orange	Output					•
Grey	Output					
Green	Neutral					•
Black	Neutral	•	•	•	•	
Wire Length		6.5"	18"	6"	6"	12"
Wire Size		30awg	30awg	30awg	30awg	30awg